

symmetric about the point $n/2$ in the frequency domain, and the information in just the first (or second) half of the frequency domain completely characterizes the original waveform—this is why only $512/2=256$ points are plotted in the graphs shown in Figure 5.8.4. In other words, if

$$\mathbf{y} = \frac{2}{n} \mathbf{F}_n \mathbf{x} = \sum_k \alpha_k (\mathbf{e}_{f_k} + \mathbf{e}_{n-f_k}) + i \sum_k \beta_k (-\mathbf{e}_{f_k} + \mathbf{e}_{n-f_k}), \quad (5.8.8)$$

then the information in

$$\mathbf{y}_{n/2} = \sum_k \alpha_k \mathbf{e}_{f_k} - i \sum_k \beta_k \mathbf{e}_{f_k} \quad (\text{the first half of } \mathbf{y})$$

is enough to reconstruct the original waveform. For example, the equation of the waveform shown in Figure 5.8.7 is

$$x(\tau) = 3 \cos 2\pi\tau + 5 \sin 2\pi\tau, \quad (5.8.9)$$

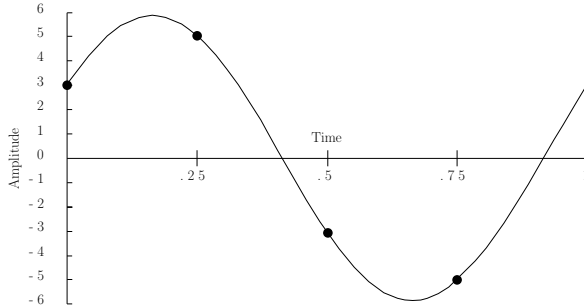


FIGURE 5.8.7

and it is completely determined by the four values in

$$\mathbf{x} = \begin{pmatrix} x(0) \\ x(1/4) \\ x(1/2) \\ x(3/4) \end{pmatrix} = \begin{pmatrix} 3 \\ 5 \\ -3 \\ -5 \end{pmatrix}.$$

To capture equation (5.8.9) from these four values, compute the vector \mathbf{y} defined by (5.8.8) to be

$$\begin{aligned} \mathbf{y} &= \frac{2}{4} \mathbf{F}_4 \mathbf{x} = \begin{pmatrix} 1 & 1 & 1 & 1 \\ 1 & -i & -1 & i \\ 1 & -1 & 1 & -1 \\ 1 & i & -1 & -i \end{pmatrix} \begin{pmatrix} 3 \\ 5 \\ -3 \\ -5 \end{pmatrix} = \begin{pmatrix} 0 \\ 3 - 5i \\ 0 \\ 3 + 5i \end{pmatrix} \\ &= \begin{pmatrix} 0 \\ 3 \\ 0 \\ 3 \end{pmatrix} + i \begin{pmatrix} 0 \\ -5 \\ 0 \\ 5 \end{pmatrix} = 3(\mathbf{e}_1 + \mathbf{e}_3) + 5i(-\mathbf{e}_1 + \mathbf{e}_3). \end{aligned}$$